




INDUSTRIAL - OTR TIRES

petlas
TRACK OF TRUST

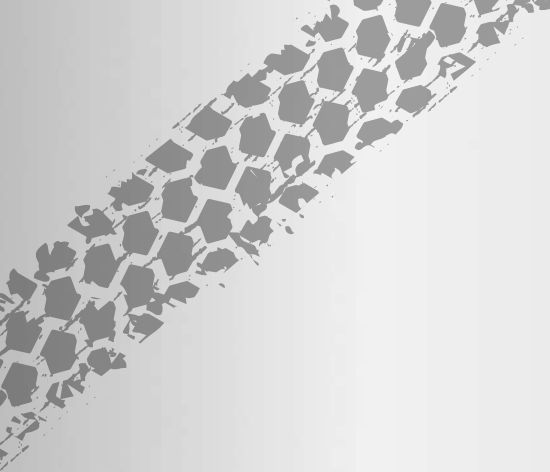

NOTICES & DISCLAIMER

- For load capacity and inflating pressure figures on different speed rates, please consult the producer company.
- Our company is entitled to change any information in this brochure without prior notice. This brochure overrides any previous documents.
- All figures are for reference and our company cannot be deemed responsible for printing errors.
- The visual content of this brochure is only representative. To find the compatible tire for your vehicle, please refer to the vehicle service or authorized tire dealer.

CONTENTS

Page 3 Range of Petlas Ind-Otr Tires

Page 4 Petlas Ind-Otr Tires by Size

Page 8 General Information

RADIAL TIRES	INDUSTRIAL TRACTION	PAGE	SKID STEER	
	Ptx ND31 (R-4)	12	IND-15 NHS (R-4)	32
	Ptx ND33 (R-4)	13	IND-35 NHS	33
			IND-40 NHS	34
	GRADER		INDUSTRIAL / INDUSTRIAL TRACTION	PAGE
	Ptx RD22 (G-2)	14	TD-45 (F-3)	35
	Ptx RD22 (L-2/E-2)	15	IND-30 (R-4)	36
			IND-15 (R-4)	37
	LOADER / GRADER		IND-25 (R-4)	38
	Ptx RD31 (L-3/G-3)	16	TA-60 (I-3)	39
	LOADER		IND-5 (R-1)	40
	Ptx TD41 (L-4)	17	PL-2 (L-2)	41
	EARTHMOVER / LOADER		GRADER	
	Ptx RD31 (E-3/L-3)	20	PG-200 (G-2)	42
	Ptx HD41 (E-4/L-4)	21	PG-300 (G-2)	43
	Ptx RD34 (E-3)	22	EARTHMOVER	
	Ptx RD35 (E-3)	23	NB-57 (E-3)	44
	Ptx CD21 (E-2)	24	NB-60 (E-3)	45
	EXCAVATOR		LOADER	
	NB-38 (E-3)	25	NB-57 (L-3)	46
	FORKLIFT		NB-60 (L-3)	47
	HL-10	26	NB-70 (L-3)	48
	HL-30	27	NB-70 (L-4)	49
	HL-40	28	PORT APPLICATION	
	SOLID ST (SOLID)	29	C+CARRIER (IND-4)	50
	COMPACTOR		C+CARRIER SMOOTH (IND-4S)	51
	FLT-2 (R-3)	30		
	PC-1 (C-1)	31		

POWER MEETS RESILIENCE IND-40



petlas
TRACK OF TRUST

RANGE OF PETLAS IND-OTR TIRES

RADIAL INDUSTRIAL TRACTION



Ptx ND31
(R-4)



Ptx ND33
(R-4)

GRADER RADIAL



Ptx RD22
(G-2)



Ptx RD22
(L-2/E-2)

LOADER / GRADER RADIAL



Ptx RD31
(L-3/G-3)

LOADER RADIAL



Ptx TD41
(L-4)

EARTHMOVER / LOADER RADIAL



Ptx RD31
(E-3/L-3)



Ptx HD41
(E-4/L-4)



Ptx RD34
(E-3)



Ptx RD35
(E-3)



Ptx CD21
(E-2)

EXCAVATOR



NB-38
(E-3)

FORKLIFT



HL-10



HL-30



HL-40




SOLID ST
(SOLID)

COMPACTOR



FLT-2 (R-3)



PC-1 (C-1)

SKID STEER



IND-15
NHS



IND-35
NHS



IND-40
NHS

INDUSTRIAL



TD-45 (F-3)



IND-30 (R-4)



IND-15 (R-4)



IND-25 (R-4)



TA-60 (I-3)



IND-5 (R-1)



PL-2 (L-2)

INDUSTRIAL TRACTION

GRADER



PG-200 (G-2)



PG-300 (G-2)

EARTHMOVER



NB-57 (E-3)



NB-60 (E-3)

LOADER



NB-57
(L-3)



NB-60
(L-3)



NB-70
(L-3)




NB-70
(L-4)

PORT APPLICATION



C+ CARRIER
(IND-4)



C+ CARRIER SMOOTH
(IND-4S)



RADIAL INDUSTRIAL TRACTION PtXND31 (R-4)

340/80 R18 (12.5 R18)
340/80 R20
480/80 R26
440/80 R28 (16.9 R28)
400/70 R20
405/70 R20
460/70 R24 (17.5L R24)



LOADER GRADER RADIAL PtX RD31 (L3/G3)

17.5 R25



RADIAL INDUSTRIAL TRACTION PtXND33 (R-4)

460/70 R24 (17.5L R24)



LOADER RADIAL PtX TD41 (L-4)

26.5 R25
29.5 R25



GRADER RADIAL PtX RD22 (G-2)

14.00 R24



EARTHMOVER LOADER RADIAL PtX RD31 (E-3/L-3)

17.5 R25
20.5 R25
23.5 R25
26.5 R25
29.5 R25



GRADER RADIAL PtX RD22 (L-2/E-2)

14.00 R24



EARTHMOVER LOADER RADIAL PtXHD41 (E-4/L-4)

23.5 R25
26.5 R25
29.5 R25



PETLAS TIRES BY SIZE



**EARTHMOVER
LOADER RADIAL
Ptx RD34 (E-3)**

33.25 R29



**EARTHMOVER
LOADER RADIAL
Ptx RD35 (E-3)**

650/65 R25



**EXCAVATOR
NB-38 (E-3)**

7.50-20
9.00-20
10.00-20



FORKLIFT HL-10

23x9-10	4.00-8
7.00-12	5.00-8
27x10-12	18x7-8
23x5-13	6.00-9
8.15-15	21x8-9
8.25-15	6.50-10



FORKLIFT HL-30

7.00-12	4.00-8
27x10-12	5.00-8
23x5-(13)	16x6-8
7.50-15	18x7-8
8.15-15	6.00-9
250-15	21x8-9
300-15	6.50-10
	23x9-10



**FORKLIFT
HL-40**

6.00-9
6.50-10
7.00-12
8.15-15
8.25-15



**FORKLIFT
SOLID ST (SOLID)**

23x9-10 (6.50F-10)	4.00-8 (3.00-D)
200/50-10 (6.50F-10)	18x7-8 (4.33R-8)
23x10-12 (8.00G-12)	5.00-8 (3.25I-8)
27x10-12 (8.00G-12)	15x4.5-8 (3.00D-8)
7.00-12 (5.00S-12)	16x6-8 (4.33R-8)
250-15 (7.0-15)	21x8-9 (6.00E-9)
8.25-15	6.00-9 (4.00E-9)
8.15-15 (7.0-15)	140/55-9 (4.00-E)
	6.50-10 (5.00F-10)



**COMPACTOR
FLT-2 (R-3)**

23.1-26



**COMPACTOR PC-1
(C-1)**

11.00-20
13.0/80 R20



SKID STEER IND-15 NHS

10-16.5 NHS
12-16.5 NHS



INDUSTRIAL TRACTION IND-15 (R-4)

14.5-20	10.0/75-15.3
16.0/70-24	11.5/80-15.3
405/70-24	10.5/80-18
480/80-26	280/80-18
23.1-26	16.0/70-20
	405/70-20



SKID STEER IND-35 NHS

10-16.5
12-16.5




INDUSTRIAL TRACTION IND-25 (R-4)

405/70-20	16.5/85-24
405/70-24	16.5/85-28
16.0/70-24	12.5/80-18
14.5-20	340/80-18
16.9-24	440/80-24
19.5L-24	480/80-26
18.4-26	440/80-28
16.9-28	16.0/70-20



SKID STEER IND-40 NHS

10-16.5 NHS
12-16.5 NHS



INDUSTRIAL TRACTION TA-60 (I-3)

15.5/80-24



INDUSTRIAL TD-45 (F-3)

11L-16SL



INDUSTRIAL TRACTION IND-5 (R-1)

18.4-26
16.9-30



INDUSTRIAL TRACTION IND-30 (R-4)

16.0/70-20



INDUSTRIAL TRACTION PL-2 (L-2)

15.5-25



PETLAS TIRES BY SIZE



**GRADER
PG-200 (G-2)**

13.00-24
14.00-24



**GRADER
PG-300 (G-2)**

16.00-24



**EARTHMOVER
NB-57 (E-3)**

14.00-24




**EARTHMOVER
NB-60 (E-3)**

16.00-25
18.00-25
18.00-33



**LOADER
NB-57 (L-3)**

17.5-25
20.5-25
23.5-25



**LOADER
NB-60
(L-3)**

17.5-25
20.5-25
23.5-25
26.5-25 CR
29.5-25 CR



**LOADER
NB-70 (L-3)**

15.5-25
17.5-25
20.5-25
23.5-25
26.5-25 CR
29.5-25 CR



**LOADER
NB-70 (L-4)**

26.5-25
29.5-25



**PORT APPLICATION
C+CARRIER
(IND-4)**

18.00-25



**PORT APPLICATION
C+CARRIER
SMOOTH (IND-4S)**

18.00-25


A) Bias

1. Brand
2. Pattern Name
3. Tire Size
4. Ply Rating
5. Load/Speed Index
6. ECE R-106 Approval Code
7. TL/TT
8. Max. Bead Seating Pressure
9. Rotation
10. Maximum Load (Inflation Pressure)
11. Construction Information
12. DOT Symbol - Week Code



B) Radial

1. Brand
2. Pattern Name
3. Tire Size
4. Tractor/Grader Type
5. TRA Code
6. Star Marking
7. Security Information
8. Construction Information
9. Load / Speed Index
10. DOT Symbol - Week Code

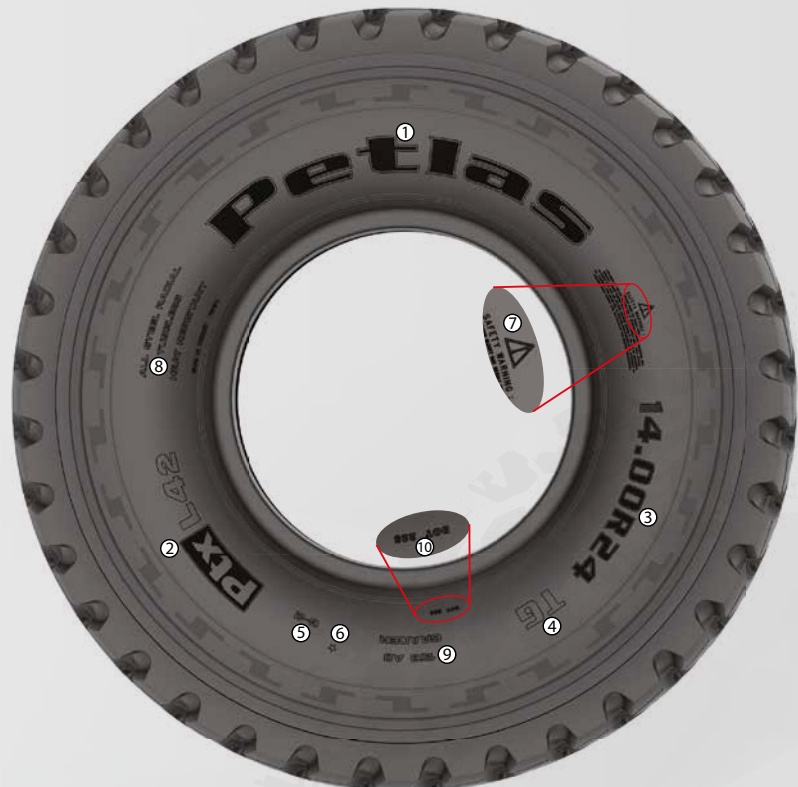

UNIT CONVERSION TABLE

UNIT CONVERSION TABLE

Unit	Abbreviation	Conversion Coefficient	Abbreviation	Unit	Abbreviation	Conversion Coefficient
Length						
inch	in	x 0,0254	= m	(Metre)	x 39,37	= in
foot	ft	x 0,3048	= m	(Metre)	x 3,281	= ft
yard	yd	x 0,9144	= m	(Metre)	x 1,0936	= yd
mile	ml	x 1,6093	= km	(Kilometre)	x 0,6214	= mile
Load						
Pound	lb	x 0,4536	= kg	(Kilogramme)	x 2,205	= lb
Long Ton (U.K) 2240 lbs	lg ton	x 1,016	= T	(Metric Tonne)	x 0,984	= lg ton
Short Ton (U.S) 2000 lbs	sh ton	x 0,907	= T	(Metric Tonne)	x 1,103	= sh ton
Pressure						
Kilo - Pascal	kPa	x 0,01	= bar	(Bar)	x 100	= kPa
Atmosphere (at sea level)	atm	x 0,986	= bar	(Bar)	x 1,014	= atm
Pound/Square inch	ibf/in ² (psi)	x 0,0703	= kg/cnf	(Kilogramme/cm ³)	x 14,22	ibf/in ² (psi)
Pound/Square inch	ibf/in ² (psi)	x 0,069	= bar	(Bar)	x 14,513	ibf/in ² (psi)
Pound/Square inch	ibf/in ² (psi)	x 0,068	= atm	(Atmosphere)	x 14,7	ibf/in ² (psi)
Pound/Square inch	ibf/in ² (psi)	x 6,895	= kPa	(Kilo Pascal)	x 0,145	ibf/in ² (psi)
Capacity						
Cubic Foot	ft ³	x 0,02832	= m ³	(Cubic Metre)	x 35,31	= ft ³
Cubic Yard	yd ³	x 0,7646	= m ³	(Cubic Metre)	x 1,308	= yd ³
Cycle Strength						
Pound Foot	lb ft	x 0,1383	= kgm	(Kilogramme Metre)	x 7,233	= lb ft
Kilogramme Metre	kgm	x 9,81	= Nm	(Newton Metre)	x 0,102	= m kg

TIRE DEFINITION CODE

Service		Tread Types	
Code	Type Of Service	Code	Tread Type
C	Compactor	C - 1	Smooth
		C - 2	Grooved
E	Earthmover	E - 1	Rib
		E - 2	Traction
		E - 3	Rock
		E - 4	Rock Deep Tread
		E - 7	Flotation
G	Grader	G - 1	Rib
		G - 2	Traction
		G - 3	Rock
L	Loader and Dozer	L - 2	Traction
		L - 3	Rock
		L - 3S	Smooth
		L - 4	Rock Deep Tread
		L - 4S	Smooth Deep Tread
		L - 5	Rock Extra Deep Tread
		L - 5S	Smooth Extra Deep Tread



LOAD INDEX

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
120	1400	150	3350	180	8000	210	19000	240	45000
121	1450	151	3450	181	8250	211	19500	241	46250
122	1500	152	3550	182	8500	212	20000	242	47500
123	1550	153	3650	183	8750	213	20600	243	48750
124	1600	154	3750	184	9000	214	21200	244	50000
125	1650	155	3875	185	9250	215	21800	245	51500
126	1700	156	4000	186	9500	216	22400	246	53000
127	1750	157	4125	187	9750	217	23000	247	54500
128	1800	158	4250	188	10000	218	23600	248	56000
129	1850	159	4375	189	10300	219	24300	249	58000
130	1900	160	4500	190	10600	220	25000	250	60000
131	1950	161	4625	191	10900	221	25750	251	61500
132	2000	162	4750	192	11200	222	26500	252	63000
133	2060	163	4875	193	11500	223	27250	253	65000
134	2120	164	5000	194	11800	224	28000	254	67000
135	2180	165	5150	195	12150	225	29000	255	69000
136	2240	166	5300	196	12500	226	30000	256	71000
137	2300	167	5450	197	12850	227	30750	257	73000
138	2360	168	5600	198	13200	228	31500	258	75000
139	2430	169	5800	199	13600	229	32500	259	77500
140	2500	170	6000	200	14000	230	33500	260	80000
141	2575	171	6150	201	14500	231	34500	261	82500
142	2650	172	6300	202	15000	232	35500	262	85000
143	2725	173	6500	203	15500	233	36500	263	87500
144	2800	174	6700	204	16000	234	37500	264	90000
145	2900	175	6900	205	16500	235	38750	265	92500
146	3000	176	7100	206	17000	236	40000	266	95000
147	3075	177	7300	207	17500	237	41250	267	97500
148	3150	178	7500	208	18000	238	42250	268	100000
149	3250	179	7750	209	18500	239	43750	269	103000

(LI) : Load Index

Speed Category

Symbol	A2	A3	A4	A5	A6	A8	B	C	D	E	F	G
Speed km/h	10	15	20	25	30	40	50	60	65	70	80	90

Sample Tire Marking


16.00 - 25 NB60 E3 32 PR TL 177 B

(This tire can carry 7300 kg load at the speed of 50 km/h.)



Go Forth

*The most demanding job on earth
requires the most durable tires in the world.
Go forth with Petlas **OTR** tires.*

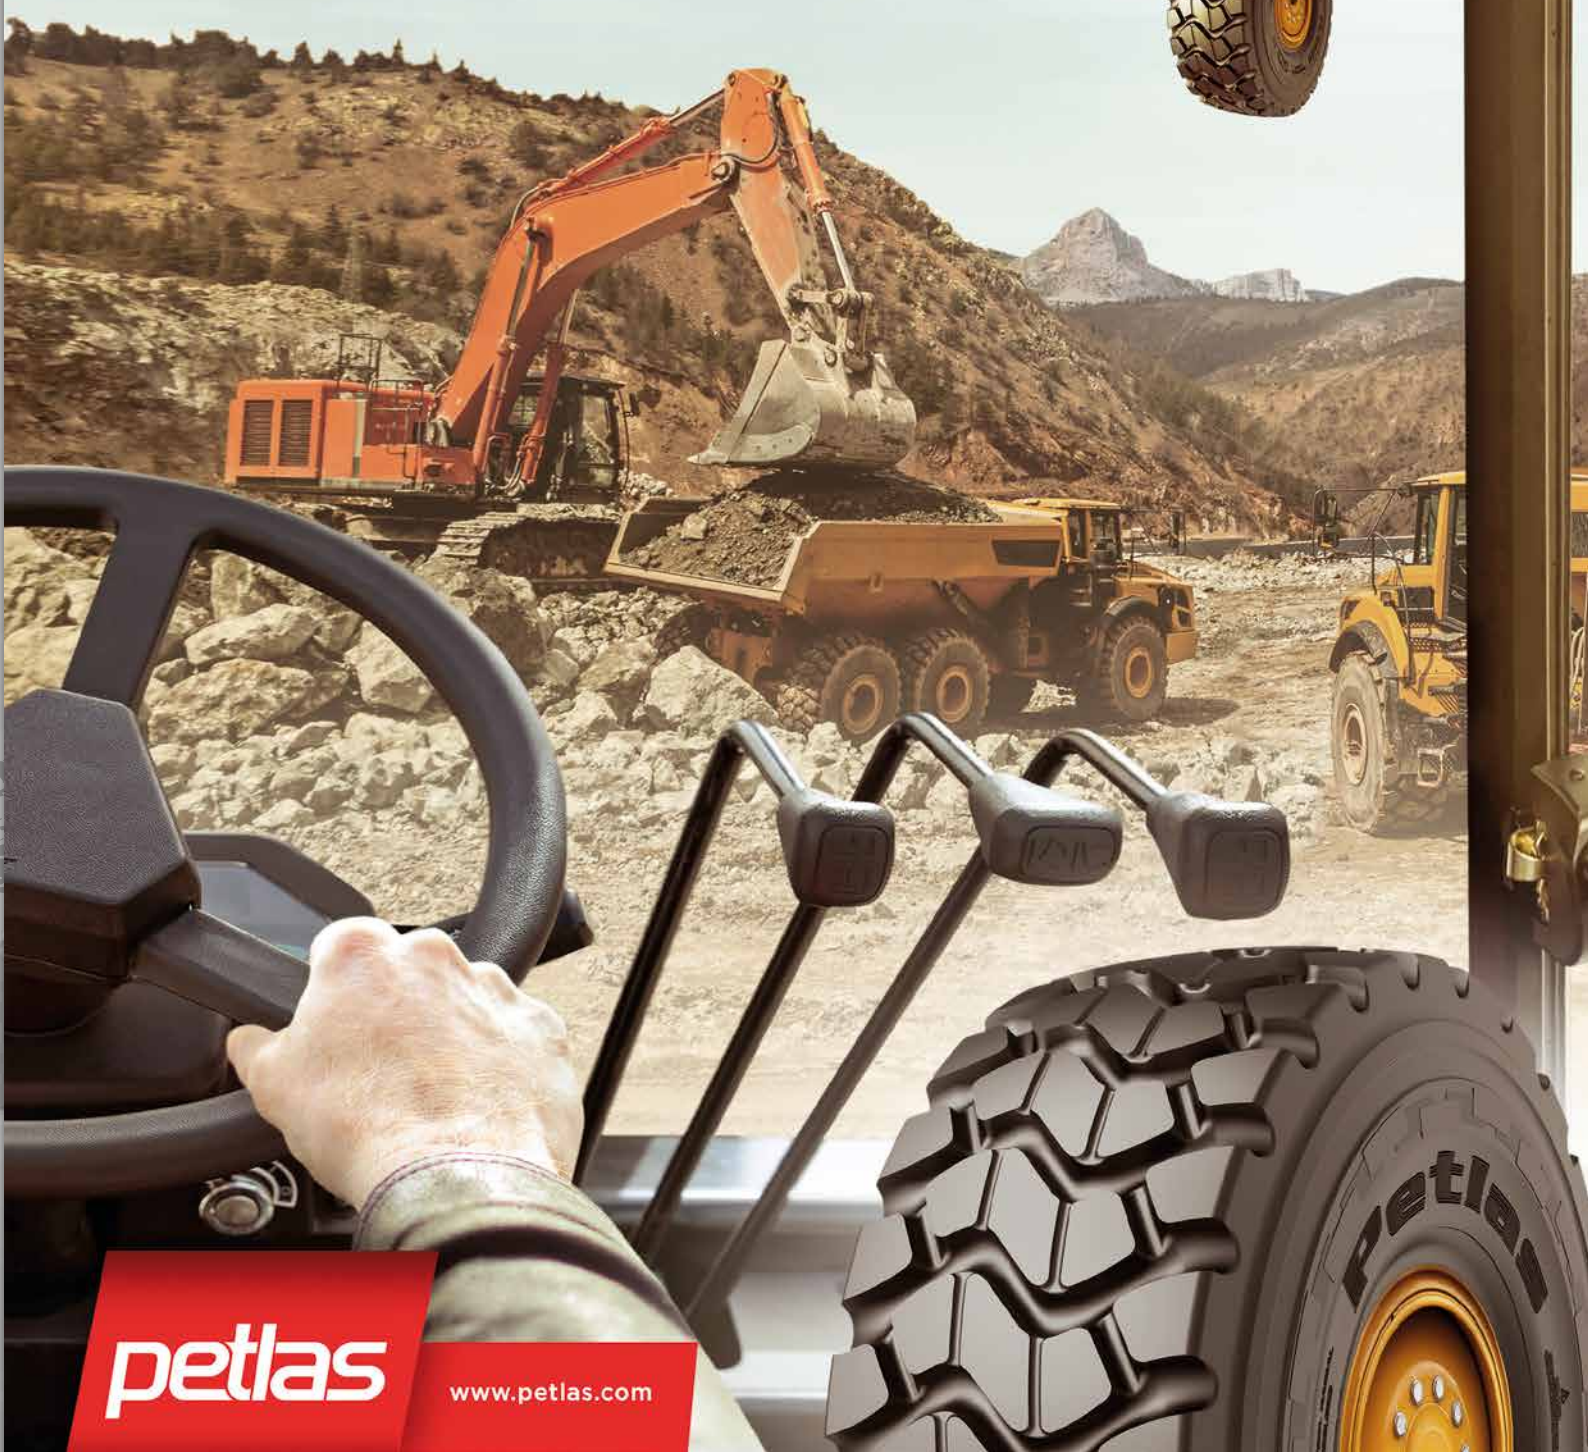


petlas

www.petlas.com

Ptx ND31 (R-4)

Ptx ND31 (R-4) tire has strong radial casing and steel belted construction. It is developed for construction equipment to be used in the areas of agriculture and construction. The directional tread pattern provides excellent traction, longevity, resistance to damage and high carrying capacity.

Ptx ND31 (R-4) is the right response to agro-industrial heavy duty needs. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders.



TIRE SIZE	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi/bar)	LOAD CAPACITY PER TIRE (KG)				
				RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)				
												10	25	30	40	50
340/80 R18 (12.5/80 R18)	TL	143	A8/B	11	W10, 11SDC, W11, 12, 12SDC	995	345	446	2975	30	58	3405	3025	2915	2725	2725
340/80 R20 (12.5 R20)	TL	138	A8/B	11	12.00, 11SDC, 12SDC W10, W11	1052	343	477	3145	29	46	2950	2570	2455	2360	2360
340/80 R20 (12.5 R20)	TL	144	A8/B	11	12.00, 11SDC, 12SDC W10, W11	1052	343	477	3145	29	58	3500	3050	2910	2800	2800
480/80 R26 (18.4 R26)	TL	167	A8/B	DW15L	DW16L	1428	479	645	4253	35	58	6810	5940	5670	5450	5450
440/80 R28 (16.9 R28)	TL	156	A8/B	DW14L	DW13, DW13L DW15L	1415	441	636	4215	35	46	5000	4440	4280	4000	4000
400/70 R20	TL	149	A8/B	13	12SDC, 13SDC, 14	1068	404	480	3194	30	58	4065	3610	3480	3250	3250
405/70 R20	TL	149	A8/B	13	12SDC, 13SDC, 14	1070	414	480	3200	30	58	4065	3610	3480	3250	3250
460/70 R24 (17.5LR24)	TL	159	A8/B	DW15L	DW14L DW16L	1251	453	562	3740	36	58	5470	4855	4680	4375	4375


UNDER DEVELOPMENT

440/80 R24



Ptx ND33 (R-4)

Ptx ND33 (R-4) is developed and designed to offer perfect traction and long life for compact industrial vehicles such as compact loaders, backhoe loaders and telehandlers. Deep and wide lugs are carefully located on the tread to ensure perfect traction on hard or soft terrains. The wide tread profile provides a balanced feel on every condition and increases the tire's service life by avoiding irregular wear. Reinforced sidewalls offer maximum resistance against cuts and puncture while the steel belts under the tread improve the tire's durability and load capacity.



TIRE SIZE	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi/bar)	LOAD CAPACITY PER TIRE (KG)				
				RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)				
												10	25	30	40	50
460/70 R24 (17.5L R24)	TL	159/159	A8/B	DW15L	DW14L, DW16L	1244.6	461	555.6	3740	25	58	5470	4855	4680	4375	4375



Ptx RD22 (G-2)

Ptx RD22 (G-2) is an all steel radial tire that promises resistance to tears and wears in worksites and on challenging roads. Specially formulated tread compound and all steel carcass structure of PtxRD22 (G-2) offer longevity. The non-directional pattern design delivers outstanding traction and grip in demanding conditions.

Ptx RD22 (G-2) is designed especially for grader applications.



TIRE SIZE	STAR RATING	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)			
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)			
													20	30	40	50
14.00 R24	★	TL	153	A8	8.00 TG SDC	9.00/1.5 (DC) ; 10.00/VA SDC	1348	364	608	3909	26	54	3650	3650	3650	3322



Ptx RD22 (L-2/E-2)

Ptx RD22 (L-2/E-2) is an all steel radial tire that promises resistance to tears and wears in worksites and on challenging roads. Specially formulated tread compound and all steel carcass structure of Ptx RD22 (L-2/E-2) offer longevity. The non-directional pattern design delivers outstanding traction and grip in demanding conditions. Ptx RD22 (L-2/E-2) is designed especially for grader applications.



TIRE SIZE	STAR RATING	TT/ TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)														
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)		Speed (KM/H)														
												6/87	6,25/ 91	6,5/ 94	6,75/ 98	7/ 102	7,25/ 105	7,5/ 109	7,75/ 112	8/ 116	8,25/ 120	8,5/ 123	8,75/ 127	9/131	9,25/ 134	9,5/ 138
14.00 R24	★★★	TL	188 A2 / 169 B	A8	10.00/1.5	10.00W 9.0 9.00V 9.00/1.5 (DC)	1368	375	608	4042	10 km/h **	7.500	7.675	7.850	8.025	8.200	8.375	8.550	8.725	8.900	9.075	9.250	9.425	9.600	9.775	10.000
											50 km/h ***	4.905	5.025	5.315	5.475	5.800	-	-	-	-	-	-	-	-	-	-



Ptx RD31 (L-3/G-3)

Ptx RD31 (L-3/G-3) is an all steel radial tire suitable for loader and grader applications. Delivers optimized performance on all grounds. The compound and the aggressive design of the tread pattern enhance handling throughout the tire's exceptional service life. Offers outstanding resistance against cuts and wears. PTx RD31 (L-3/G-3) is the ultimate choice when traction is the priority.



TIRE SIZE	STAR RATING	TT/ TL	LOAD / SPEED INDEX	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W LOAD)		INFLATING PRESSURE (bar/psi)	LOAD CAPACITY PER TIRE (KG)					
				RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)		SPEED (KM/H)					
											3/44	3,5/51	4 /58	4,5/65	5 /73	5,75/83
17.5 R25	★	TL	176 A2 / 153 A8	14.00/1.5	14.00/1.3 (DC)	1348	442	583	4025	10	-	5.600	6.000	6.500	7.100	-
					13.00/1.4 (DC)					40	3650	-	-	-	-	-



Ptx TD41 (L-4)

It is a high tread depth tire designed for wheel loaders. The tread pattern and carcass structure are especially designed for marble quarries and mine sites. With its specially developed tread mixture and reinforced heel structure, it provides high performance in fields where traction and grip are high.



TIRE SIZE	STAR RATING	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	Speed (KM/H))	LOAD CAPACITY PER TIRE (KG)					
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			INFLATING PRESSURE (psi/bar)	4,5/51	4/58	4,5/65	5/73	5,75/83
26.5 R25	★★	TL	209	A2	22.00/3.0	22.00/4.0 IF	1755	705	772	5195	57	10 km/h	14.600	15.000	16.150	17.350	18.500	
29.5 R25	★★	TL	216	A2	25.00/3.5	25.00/4.5 IF	1861	776	811	5546	63	10 km/h	16.450	18.150	19.550	21.000	22.400	



Ptx RD31

(L3/G3)





petlas
TRACK OF TRUST

Ptx RD31 (E-3/L-3)

Ptx RD31 (E-3 / L-3) is an all steel radial OTR tire that offers ultimate resistance to all kind of damage and is designed to be used on loaders and articulated trucks.

Demonstrates efficient self-cleaning feature thanks to its special grooving geometry. Inter-located blocks keep their integrity on all kind of grounds. Specially designed tread compound minimizes cuts and punctures on semi rough ground conditions while simultaneously reducing heat generation to boost service life and improve wear performance.



TIRE SIZE	STAR RATING	TT/ TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (bar/psi)	LOAD CAPACITY PER TIRE (KG)				
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)				
													3,5 / 51	4 / 58	4,5 / 65	5 / 73	5,75 / 83
17.5 R25	★★	TL	182 / 167	A2 / B	14.00/1.5	14.00/1.3 (DC) 13.00/1.4 (DC)	1348	442	583	4025	29	10	6.250	6.700	7.350	7.925	8.500
												50	4.470	5.000	5.450	-	-
20.5 R25	★★	TL	193 / 177	A2 / B	17.00/2.0	17.00/2.0 IF	1484	550	652	4408	35	10	8.450	9.200	9.950	10.700	11.500
												50	6.000	6.700	7.300	-	-
23.5 R25	★★	TL	201 / 185	A2 / B	19.50/2.5	19.50/2.5 IF	1611	630	711	4804	39	10	10.650	11.750	12.750	13.600	14.500
												50	7.500	8.500	9.250	-	-
26.5 R25	★★	TL	209 / 193	A2 / B	22.00/3.0	22.00/3.0 IF	1755	705	772	5195	44	10	13.600	15.000	16.150	17.350	18.500
												50	9.500	10.500	11.500	-	-
29.5 R25	★★	TL	216 / 200	A2 / B	25.00/3.5	25.00/3.5 IF	1861	776	811	5546	44	10	16.450	18.150	19.550	21.000	22.400
												50	11.500	12.750	14.000	-	-



Ptx HD41 (E-4/L-4)

It is especially designed for Articulated Haulers and can also be used in wheel loaders. It is a multi-purpose tire with high tread depth. It provides a long-lasting performance by providing excellent resistance to cuts and heat with its honeycomb-shaped block pattern structure and specially developed tread mixture.



TIRE SIZE	STAR RATING	TT/ TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/ LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (bar/psi)	LOAD CAPACITY PER TIRE (KG)				
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)				
													4,5 / 51	4 / 58	4,5 / 65	5 / 73	5,75 / 83
23.5 R25	★★	TL	201	A2	19.50/2.5	19.50/2.5 IF	1611	630	711	4804	39	10	10.650	11.750	12.750	13.600	14.500
26.5 R25	★★	TL	209	A2	22.00/3.0	22.00/3.0 IF	1755	705	772	5195	57	10	14.600	15.000	16.150	17.350	18.500
29.5 R25	★★	TL	216	A2	25.00/3.5	25.00/3.5 IF	1861	776	811	5546	63	10	16.450	18.150	19.550	21.000	22.400



Ptx RD34 (E-3)

Ptx RD34 is a durable E3 construction equipment tire developed for scraper vehicles, offering a long life.



TIRE SIZE	STAR RATING	TT/ TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (bar/psi)	LOAD CAPACITY PER TIRE (KG)				
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)				
													3,5 / 51	4 / 58	4,5 / 65	5 / 73	5,75 / 83
33.25 R29	★★	TL	209	B	27.00/3.5	-	2088	727	944	6201	46	50	14.000	15.500	17.000	18.500	19.250



Ptx RD35 (E-3)

Ptx RD35 tire designed to be used in articulated dump trucks. With its specially developed tread compound, it provides excellent resistance to cuts, and longevity.



TIRE SIZE	STAR RATING	TT/ TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (bar/psi)	LOAD CAPACITY PER TIRE (KG)			
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)			
													30	40	50	60
650/65 R25	★★	TL	180	B	19.50/2.5	19.50/2.5	1487	631	670	4786	41	65	8800	8400	8000	7590


* Please contact the manufacturer for load carrying capacity at different speeds



petlas

Ptx CD21 (E-2)

An industrial crane tire developed for mixed service (On/Off Road) usage. Designed to provide comfort on asphalt and superior traction in challenging construction site conditions.



TIRE SIZE	TT/ TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi/bar)	LOAD CAPACITY PER TIRE (KG)							
				RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)							
												30	40	50	65	70	80	90	100
445/95 R25	TL	-	174 / F	11.25 x 25	11.25/2.0 11.00/1.7 CR 11.00/1.7 CRL 13.00/2.0 635x280-CR	1494	464	608	4.437	25	131	8375	7705	7505	7205	7035	6700	6300	5920



NB-38 (E-3)



NB-38 is specially developed for road construction excavators. Its aggressive tread pattern delivers outstanding traction and enables excellent self-cleaning. Promises high resistance to cuts and tears and thus, ensures longevity thanks to its reinforced carcass structure.



TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/ LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE bar/psi	LOAD CAPACITY PER TIRE (KG)	
													SINGLE AXE USAGE KG*	SINGLE AXE USAGE KG*
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			50 km/h	
7.50-20	10	TT	123/122	B	5.50F	6.00F	904	214	417	2622	15	58	1550	1500
9.00-20	14	TT	140/137	B	7.00	6.5 ; 7.5	1036	230	471	3004	20	62	2500	2300
10.00-20	16	TT	146/143	B	7.50	7.0 ; 8.0	1060	270	481	3074	22	109	3000	2725



HL-10 (PNEUMATIC)

HL-10 is designed for general purpose tasks. Its strong carcass structure and bead construction provide high performance and durability against impacts.



TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	INFLATING PRESSURE (psi)	RIM		INFLATED DIMENSIONS (NO LOAD)		LOAD CAPACITY PER TIRE (KG)
						RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	
4.00-8	8	TT	94	A5	131	3 1/4 I	3.00D	414	115	670
5.00-8	10	TT	111	A5	145	3.00D	3 1/4 I, 3 3/4 I	467	132	1090
18x7-8	16	TT	125	A5	145	4.33R	-	462	173	1650
6.00-9	12	TT	121	A5	145	4.00E	-	540	160	1450
21x8-9	14	TT	131	A5	131	6.00E	-	535	200	1950
6.50-10	12	TT	125	A5	131	5.00F	5.50F	588	177	1650
23x9-10	20	TT	142	A5	145	6.50F	-	595	225	2650
7.00-12	14	TT	134	A5	131	5.00S	-	672	192	2120
27x10-12	14	TT	143	A5	102	8.00G	-	690	255	2725
23x5-13	10	TT	121	A5	116	3.75P	-	635	155	1150
8.15-15	14	TT	146	A5	145	7.0	-	707	216	3000
8.25-15	16	TT	149	A5	134	6.5	7	836	234	3550



HL-30 (PNEUMATIC)

HL-30 (PNEUMATIC) delivers high maneuverability thanks to its reinforced tread block pattern. Offers high performance on the field with its strong carcass structure and reinforced bead design. Provides excellent durability feature and resistance against cuts and wears.



TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	INFLATING PRESSURE (psi/bar)	RIM		INFLATED DIMENSIONS (NO LOAD)		LOAD CAPACITY PER TIRE (KG)
						RECOM. (INCHES)	PERMITTED (INCHES)	SECTION WIDTH (MM)	OUTER DIAMETER (MM)	
4.00-8	8	TT	94	A5	131	3.25	3.00D, 3 ¼ I	115	414	670
5.00-8	10	TT	111	A5	145	3.00D	3 ¼ I, 3 ¾ I	132	467	1090
16x6-8	16	TT	113	A5	145	4.33R	-	152	425	1150
18x7-8	16	TT	125	A5	145	4.33R	-	173	462	1650
6.00-9	12	TT	121	A5	145	4.00E	-	160	540	1450
21x8-9	14	TT	131	A5	131	6.00E	-	200	535	1950
6.50-10	12	TT	125	A5	131	5.00F	5.50F	177	588	1650
23x9-10	20	TT	142	A5	145	6.50F	-	225	595	2650
7.00-12	14	TT	134	A5	131	5.00S	-	192	672	2120
27x10-12	14	TT	143	A5	102	8.00G	-	255	690	2725
23x5-(13)	10	TT	121	A5	116	3.75P	-	155	635	1450
7.50-15	14	TT	144	A5	135	6.0, 6.00S	5.5, 6.5	212	772	2800
8.15-15	14	TT	146	A5	145	7.0	-	216	707	3000
250-15	20	TT	155	A5	145	7.0, 7.5	-	250	735	3875
300-15	20	TT	164	A5	131	8.0	-	300	840	5000



HL-40 (PNEUMATIC)

HL-40 offers ultimate durability with its extra tread depth. Center reinforced block structure provides exceptional maneuverability especially while spot turnings. Resistant to cuts and chunking thanks to its strong carcass structure.



TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	INFLATING PRESSURE (psi/bar)	RIM		INFLATED DIMENSIONS (NO LOAD)		LOAD CAPACITY PER TIRE (KG)
						RECOM. (INCHES)	PERMITTED (INCHES)	SECTION WIDTH (MM)	OUTER DIAMETER (MM)	
6.00-9*	12	TT	121	A5	145	4.00E	-	160	540	1450
6.50-10*	12	TT	125	A5	131	5.00F	5.50F	177	588	1650
7.00-12*	14	TT	134	A5	131	5.00S	-	192	672	2120
8.15-15*	14	TT	146	A5	145	7.0	-	216	707	3000
8.25-15*	16	TT	152	A5	134	6.5	7	234	836	3550

*EXTRA DURABLE



SOLID ST (SOLID)

SOLID ST is developed to offer extended service life and minimized maintenance costs for forklifts operating on even surfaces. The premium rubber compound provides excellent wear behavior and extreme resistance to cuts, chips and wear. The cushion layer ensures that toughness does not lead to compromises on operator's comfort and forklift's service life. Steel bead wires embedded in the hard base compound guarantees integrity by preventing the tire from rotating on the rim.



TIRE SIZE	RECOM. (Inches)	BEAD*	OUTER DIAMETER (mm)	SECTION WIDTH (mm)	LOAD CAPACITY (kg)					LOAD/SPEED INDEX
					FORKLIFT up to 25 km/h		TRAILER			
					LOAD WHEEL	STEER WHEEL	6 km/h	10 km/h	25 km/h	
4.00-8	3.00-D	Q/N	405	107	950	730	950	860	730	97/A5
5.00-8	3.25I-8	Q/N	459	125	1415	1090	1415	1285	1090	111/A5
15x4.5-8	3.00D-8	Q/N	379	114	1040	800	1040	945	800	100/A5
16x6-8	4.33R-8	Q/N	416	150	1495	1150	1495	1360	1150	113/A5
18x7-8	4.33R-8	Q/N	452	165	2145	1650	2145	1945	1650	125/A5
6.00-9	4.00E-9	Q/N	529	136,6	1885	1450	1885	1710	1450	121/A5
21x8-9	6.00E-9	Q/N	520	181	2755	2120	2755	2500	2120	134/A5
140/55-9	4.00-E	Q/N	375	129	1170	900	1170	1060	900	104/A5
6.50-10	5.00F-10	Q/N	574	166	2340	1800	2340	2125	1800	128/A5
23x9-10	6.50F-10	Q/N	583	198	3445	2650	3445	3125	2650	142/A5
200/50-10	6.50F-10	Q/N	457	194	2470	1900	2470	2240	1900	130/A5
23x10-12	8.00G-12	Q/N	581	242	3770	2900	3770	3420	2900	145/A5
27x10-12	8.00G-12	Q/N	680	245	3900	3000	3900	3540	3000	146/A5
7.00-12	5.00S-12	Q/N	656	173	2920	2240	2920	2645	2240	136/A5
8.15-15	7.0-15	Q/N	690	212	3445	2650	3445	3125	2650	142/A5
8.25-15	6.5-15	Q/N	825	211	4750	3650	4750	4300	3650	153/A5
250-15	7.0-15	Q/N	720	222	4745	3650	4745	4310	3650	153/A5

Q: Quick

N: Normal

*For each tire size of the Solidmax N (Solid) forklift tires, there are two options: Quick Fit and Normal Fit.



petlas

FLT-2 (R-3)

FLT2 (R-3) is specially designed for compactors applications. Delivers high impact resistance when used in paving applications. Offers outstanding longevity thanks to its strong carcass structure.



TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)	
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH MIN-MAX	DYNAMIC RADIUS CIRCLE (MM)	STATIC LOADED RADIUS (MM)			Speed (KM/H)	
													40	50
23.1-26	10	TT	158	A8	DW20	-	1580	587	4582	708	27	25	4250	3870
23.1-26	12	TL	162	A8	DW20	-	1580	587	4582	708	27	28	4750	4325
23.1-26	14	TL	166	A8	DW20	-	1580	587	4582	708	27	28	5300	4825



PC-1 (C-1)



Suitable for industrial compacting roadbeds and rolling asphalt. Heat resistant smooth pattern design distributes the pressure equally on the road. Delivers high mileage performance and comfort riding.




TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/ LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			
11.00-20	14	TT	165	A2	9.0,9.00V	8.0V,8.5,10.0	1048	326	476	3039	-	94	5120
13.0/80 R20	-	TL	164	A3	8.0,B8.0, 8.0V	7.33V,7.5, B7.5,7.5V,8.37V	1070	291	785	3103	-	131	5000



IND-15 NHS



Designed for general purpose use in construction applications. Delivers exceptional traction thanks to its directional pattern design and robust lugs. Strong carcass structure enhances resistance to cuts, tears and wears. Offers outstanding cost efficiency.



TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)				
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	DYNAMIC RADIUS CIRCLE (MM)	STATIC LOADED RADIUS (MM)			Speed (KM/H)				
10	15	20	25	30													
10-16,5 NHS	8	TL	131 / A3	R-4	8,25	-	773	264	356	2242	17	54	2090	1950	1795	1660	1520
12-16,5 NHS	10	TL	142 / A3	R-4	9,75	-	831	307	378	2410	19	65	2835	2650	2440	2255	2065




IND-35 NHS



Skid steer tire solution for harsh off-road applications. Delivers enhanced durability, traction and side impact resistance. Offers excellent performance and value by reducing operating costs.




TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)				
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)				
													10	15	20	25	30
10-16,5 NHS	12	TL	138	A3	8,25	-	799	260	365	2318	34	90	2525	2360	2170	2005	1840
12-16,5 NHS	14	TL	147	A3	9,75	-	870	307	394	2520	34	90	3290	3075	2830	2610	2400



IND-40 NHS



IND40 is a meticulously designed tire engineered for skid steers, aimed at enhancing performance in scrap yards, recycling facilities, and mining applications. IND40 not only meets but thrives in the toughest conditions, delivering unmatched performance in rugged environments.



TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)				
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	DYNAMIC RADIUS CIRCLE (MM)	STATIC LOADED RADIUS (MM)			Speed (KM/H)				
													10	15	20	25	30
10-16,5 NHS	12	TL	138	A3	8,25	-	801	260	365	2378	34	90	2525	2360	2170	2005	1840
12-16,5 NHS	14	TL	147	A3	9,75	-	855	303	388	2539	34	90	3290	3075	2830	2610	2400



TD-45 (F-3)

It is developed for front axles of 2WD industrial tractors and compact earthmovers for the purpose of usage in agricultural areas and worksites. Moreover, it is multi-purpose, low-profile tire that can be used on trailers for on or off road. It provides resistance and longevity against to tears and wears on hard soil, asphalt, and concrete with its specially formulated tread compound and reinforced carcass structure.




TIRE SIZE	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)	
				RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)		Speed (KM/H)	
											30	40
11L-16 SL	TL	116	A8	W8L, 8LB	W10L, 10LB	800	284	371	2368	64 / 4,4	1385	1250



IND-30 (R-4)

IND-30 is an R-4 pattern designed to provide ultimate traction and durability for compact loaders, backhoe loaders and telehandlers. Wide and deep lugs are purposefully located to maximize traction on challenging terrains and ensure maximum durability against cuts and damages. Guarantees consistent performance throughout the tire's long lifespan with wide tread profile that improves the tire's resistance against irregular wear. The number and angles of undertread plies are specifically determined to improve lateral stability.




TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)					
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH MIN-MAX	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)					
													10	15	20	25	30	40
16.0/70-20	16	TL	156	A8	13	12SDC ; 13SDC ; 14	1075	418	495	3103	31	58	5000	4520	4360	4240	4160	4000



IND-15 (R-4)

Designed for general purpose use in construction applications. Delivers exceptional traction thanks to its directional pattern design and robust lugs. Strong carcass structure enhances resistance to cuts, tears and wears. Offers outstanding cost efficiency.




TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)							
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	DYNAMIC RADIUS CIRCLE (MM)	STATIC LOADED RADIUS (MM)			Speed (KM/H)							
10	15	20	25	30	40	50	65													
10.0/75-15.3	12	TL	126	A8	9.00	-	780	264	2262	355	19	68	2125	1920	1850	1800	1770	1700	-	-
11.5/80-15.3	12	TL	135	A8	9.00	-	867	290	2514	390	19	59	2725	2460	2375	2310	2265	2180	-	-
10.5/80-18	12	TL	134	A8	W9	W8 ; 9.00	907	274	2630	413	20	54	2650	2395	2310	2245	2205	2120	-	-
280/80-18	12	TL	134	A8	W9	W8; W10	905	282	2625	412	20	54	2650	2395	2310	2245	2205	2120	-	-
14.5-20	14	TT	143	D	11	11 SDC	1095	355	3176	495	28	51	4495	4085	3545	3350	3135	2890	2835	2725
14.5-20	14	TL	143	D	11	11 SDC	1095	355	3176	495	28	51	4495	4085	3545	3350	3135	2890	2835	2725
405/70-20	14	TT	154	A8	13	12SDC ; 13SDC ; 14	1097	418	3181	496	31	51	3845	3475	3350	3260	3200	3075	-	-
16.0/70-20	14	TT	154	A8	13	12SDC ; 13SDC ; 14	1097	418	3181	496	31	51	4690	4240	4090	3975	3900	3750	-	-
16.0/70-24	14	TL	152	B	13.00	13 SDC	1178	407	3416	538	32	51	5800	-	-	-	-	-	-	-
405/70-24	14	TL	152	B	13.00	13 SDC	1178	407	3416	538	32	51	5800	-	-	-	-	-	-	-
23.1-26	14	TL	166	A8	DW20B	-	1580	587	4582	708	39	30	6560	5930	5720	5565	5460	5250	-	-
480/80-26	12	TL	156	A8	DW15L	DW16L	1428	479	4141	645	27	36	5000	4520	4360	4240	4160	4000	-	-



IND-25 (R-4)

Specially designed for backhoe and telehandler applications. Offers ultimate resistance to cuts, tears, chips and chunks with its exceptional tread compound and wide lugs. Strong carcass structure ensures longevity.




TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/ LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)							
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)							
													10	15	20	25	30	40	50	65
16.5/85-24	12	TL	149	A8	W13L	W15L; W14L	1322	417	597	3834	30	41	4065	3675	3545	3445	3380	3250	2925	-
16.5/85-24	16	TL	156	A8	W13L	W15L; W14L	1322	417	597	3834	30	54	5000	4520	4360	4240	4160	4000	3600	-
12.5/80-18	14	TL	146	A8	W9	11.00	987	308	446	2862	27	62	3750	3390	3270	3180	3120	3000	2700	-
340/80-18	12	TL	142	A8	11	W10; W11	1001	343	452	2903	27	54	3315	2995	2890	2810	2755	2650	2385	-
440/80-24	12	TL	149	A8	DW14L	DW13; DW13L; DW15L	1314	441	594	3810	30	38	4065	3675	3545	3445	3380	3250	2925	-
480/80-26	14	TL	158	A8	DW15L	DW16L	1428	479	647	4141	32	42	5310	4800	4630	4505	4420	4250	3825	-
440/80-28	12	TL	152	A8	DW14L	DW13; DW13L; DW15L	1415	441	645	4104	30	38	4440	4012	3870	3765	3690	3550	3195	-
16.0/70-20	14	TL	154	A8	13	12SDC; 13SDC; 14	1075	418	495	3103	33	51	4690	4240	4090	3975	3900	3750	3375	-
16.0/70-20	14	TL	156	A8	13	12SDC; 13SDC; 14	1075	418	495	3103	33	58	5000	4520	4360	4240	4160	4000	3600	-
405/70-20	16	TL	154	A8	13	12SDC; 13SDC; 14	1075	418	495	3103	33	51	4690	4240	4090	3975	3900	3750	3375	-
405/70-24	14	TL	152	B	13.00	13 (DC) - 13 (SDC)	1178	407	542	3405	34	51	-	3975	3905	3835	3765	3655	3550	-
16.0/70-24	14	TL	152	B	13.00	13 (DC) - 13 (SDC)	1178	407	542	3405	34	51	-	3975	3905	3835	3765	3655	3550	-
14.5-20	14	TT	143	D	11	11 SDC	1095	355	495	3176	28	51	4495	4085	3545	3350	3135	2890	2835	2725
14.5-20	14	TL	143	D	11	11 SDC	1095	355	495	3176	28	51	4495	4085	3545	3350	3135	2890	2835	2725
16.9-24	12	TL	149	A8	DW15L	DW14L	1310	429	592	3799	30	38	4065	3675	3545	3445	3380	3250	2925	-
16.9-24	14	TL	152	A8	DW15L	DW14L	1310	429	592	3799	30	43	4440	4010	3870	3760	3690	3550	3195	-
19.5L-24	12	TL	151	A8	DW16A	-	1314	495	594	3810	29	34	4315	3890	3760	3655	3590	3450	3105	-
18.4-26	12	TL	156	A8	DW16L	DW15L	1425	467	644	4133	32	36	5000	4520	4360	4240	4160	4000	3600	-
18.4-26	14	TL	158	A8	DW16L	DW15L	1425	467	644	4133	32	42	5310	4800	4630	4505	4420	4250	3825	-
18.4-26	16	TL	160	A8	DW16L	DW15L	1425	467	644	4133	32	48	5625	5085	4905	4770	4680	4500	4050	-
16.9-28	12	TT	152	A8	DW15L	DW14L	1410	429	643	4089	30	38	4440	4012	3870	3765	3690	3550	3195	-
16.9-28	12	TL	152	A8	DW15L	DW14L	1410	429	643	4089	30	38	4440	4012	3870	3765	3690	3550	3195	-
16.9-28	14	TL	156	A8	DW15L	DW14L	1410	429	643	4089	30	44	5000	4520	4360	4240	4160	4000	3600	-



TA-60 (I-3)

TA-60 (I-3) tire designed for heavy duty tractor applications. Reinforced carcass structure provides exceptional durability and ensures longevity. Features excellent self-cleaning properties and outstanding grip in challenging off road conditions. The tread pattern provides excellent stability during operations.



TIRE SIZE	PR	TT/TL	LOAD INDEX		SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (FREE ROLLING SPEED, KM/H)	LOAD CAPACITY PER TIRE (DRIVE WHEEL SPEED, KM/H)
			FREE ROLLING (KG)	DRIVE WHEEL (KG)		RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			40	40
15.5/80-24 RF	12	TL	157	145	A8	W12	W13, W14L	1262	394	573	3660	34	43	4125	2900
15.5/80-24 RF	16	TL	163	151	A8	W12	W13, W14L	1262	394	573	3660	34	58	4875	3450


RF: REINFORCED



petlas

IND-5 (R-1)

Suitable for small loader, backhoe and telehandler applications. The special tread design offers exceptional traction. Offers outstanding durability thanks to its special compound.



TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/ LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)					
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)					
													10	15	20	25	30	40
18.4-26	14	TL	145	A8	W16L	W15L	1450	467	647	4321	38	40	4060	3857	3654	3451	3248	2900
16.9-30	14	TL	153	A8	W15L	W14L	1485	429	677	4307	39	42	5250	5000	4700	4450	4200	3650



PL-2 (L-2)

The ideal tire for compact machinery applications. Deep tread depth and directional tread pattern enhance traction in challenging off road conditions. Offers excellent self-cleaning feature with its special lug design.



TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)							
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)							
													15	20	25	30	35	40	50	
15.5-25	12	TL	149	B	12.00/1.3	12.00/1.3 (DC) (1)	1277	394	581	3703	25	36	3640	3575	3510	3445	3380	3350	3250	




petlas

PG-200 (G-2)

Specially designed for grader and construction machinery applications.

Offers excellent durability thanks to its solid tread center structure. Strong nylon carcass structure promises resistance against cuts, chunks and tears. Delivers outstanding traction in challenging conditions with its open shoulders.




TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/ LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)						
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)						
													15	20	25	30	35	40	50
13.00-24	12	TT	143	A8	8.00 TG SDC	9.00/1.5 (DC) (1) ; 10.00/VA SDC	1278	333	579	3706	25	44	3080	2970	2890	2835	2780	2725	2480
13.00-24	12	TL	143	A8	8.00 TG SDC	9.00/1.5 (DC) (1) ; 10.00/VA SDC	1278	333	579	3706	25	44	3080	2970	2890	2835	2780	2725	2480
13.00-24	16	TT	151	A8	8.00 TG SDC	9.00/1.5 (DC) - 10.00/VA SDC	1278	333	579	3706	25	44	3900	3760	3660	3560	3520	3450	3140
13.00-24	16	TL	151	A8	8.00 TG SDC	9.00/1.5 (DC) - 10.00/VA SDC	1278	333	579	3706	25	44	3900	3760	3660	3560	3520	3450	3140
14.00-24	16	TT	153	A8	8.00 TG SDC	9.00/1.5 (DC) (1) ; 10.00/VA SDC	1348	362	608	3909	26	54	4125	3980	3870	3800	3725	3650	3325
14.00-24	16	TL	153	A8	8.00 TG SDC	9.00/1.5 (DC) (1) ; 10.00/VA SDC	1348	362	608	3909	26	54	4125	3980	3870	3800	3725	3650	3325



PG-300 (G-2)

Designed for grader and construction machinery applications. Special tread compound increases service life and improves cut resistance. Delivers enhanced durability, traction and side impact resistance and reduces operating costs. Strengthened bead and body structure makes it suitable for being retreaded.




TIRE SIZE	PR	TT/ TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)						
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)						
													15	20	25	30	35	40	50
16.00-24	16	TL	160	A8	10.00VA SDC	-	1459	427	653	4231	32	47	5085	4905	4770	4680	4590	4500	4095



NB-57 (E-3)

Offers reliable performance in challenging off road conditions. Ensures resistance against chips and chunks thanks to its durable nylon carcass construction. Massive cross lugs and provides excellent traction with wide ground contact.




TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)						
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)						
30	40	45	50	55	60	65													
14.00-24	16	TT	153	D	10.00 VA	10.00 ; 9.00 ; 9.00V	1360	375	613	3944	24	61	4455	4345	4310	4235	4125	3945	3620
14.00-24	20	TL	157	D	10.00 VA	10.00 ; 9.00 ; 9.00V	1360	375	613	3944	24	69	5045	4920	4880	4800	4675	4470	4100
14.00-24	24	TT	160	D	10.00 VA	10.00 ; 9.00 ; 9.00V	1360	375	613	3944	24	83	5570	5435	5390	5300	5165	4940	4530
14.00-24	28	TT	168	D	10.00 VA	10.00 ; 9.00 ; 9.00V	1360	375	613	3944	24	94	6890	6720	6665	6550	6385	6105	5600
14.00-24	28	TL	168	D	10.00 VA	10.00 ; 9.00 ; 9.00V	1360	375	613	3944	24	94	6890	6720	6665	6550	6385	6105	5600
14.00-24	32	TL	170	D	10.00 VA	10.00 ; 9.00 ; 9.00V	1360	375	613	3944	24	105	7380	7200	7140	7020	6840	6540	6000
14.00-24	32	TT	170	D	10.00 VA	10.00 ; 9.00 ; 9.00V	1360	375	613	3944	24	105	7380	7200	7140	7020	6840	6540	6000



NB-60 (E-3)

Delivers outstanding grip in construction sites thanks to its non-directional tread pattern design. The tread compound improves cut and chip resistance. Offer ultimate durability thanks to solid tread center structure and strong nylon carcass.




TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)						
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			15	20	25	30	35	40	50
16.00-25	32	TL	177	B	11.25/2.0	11.25/2.0 IF (2); 13.00/2.0	1493	432	670	4330	31	94	8175	8030	7885	7740	7595	7520	7300
18.00-25	32	TL	183	B	13.00/2.5	13.00(2.5 IF (2); 15.00/2.5	1615	498	719	4684	34	83	9800	9625	9450	9275	9100	9015	8750
18.00-25	40	TL	187	B	13.00/2.5	13.00(2.5 IF (2); 15.00/2.5	1615	498	719	4684	34	102	10920	10725	10530	10335	10140	10045	9750
18.00-33	32	TL	188	B	13.00/2.5	-	1818	498	821	5272	37	83	11200	11000	10800	10600	10400	10300	10000



NB-57 (L-3)

Offers reliable performance in challenging off road conditions. Its durable nylon carcass construction ensures resistance against chips and chunks. Massive cross lugs and wide ground contact provides excellent traction.




TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/ LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)			LOAD CAPACITY PER TIRE (KG)		
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	DYNAMIC RADIUS CIRCLE (MM)	STATIC LOADED RADIUS (MM)			OFF ROAD PURPOSES			HARD IMPROVED SURFACE		
													STATIC	10 KM/H	25 KM/H	STATIC	5 KM/H	10 KM/H
17.5-25	12	TL	171	A2	14.00/1.5	14.00/1.3 (1); 13.00/1.4 (DC)	1348	445	610	3909	26	51	9840	6150	5230	11070	8920	8305
17.5-25	16	TT	177	A2	14.00/1.5	14.00/1.3 (1); 13.00/1.4 (DC)	1348	445	610	3909	26	69	11680	7300	6205	13140	10585	9855
17.5-25	16	TL	177	A2	14.00/1.5	14.00/1.3 (1); 13.00/1.4 (DC)	1348	445	610	3909	26	69	11680	7300	6205	13140	10585	9855
17.5-25	20	TL	181	A2	14.00/1.5	14.00/1.3 (1); 13.00/1.4 (DC)	1348	445	610	3909	26	83	13200	8250	7015	14850	11965	11140
20.5-25	16	TL	181	A2	17.00/1.7	17.00/2.0 IF (2)	1492	520	669	4327	30	51	13200	8250	7015	14850	11965	11140
20.5-25	20	TL	186	A2	17.00/1.7	17.00/2.0 IF (2)	1492	520	669	4327	30	65	15200	9500	8075	17100	13775	12825
20.5-25	24	TL	189	A2	17.00/1.7	17.00/2.0 IF (2)	1492	520	669	4327	30	76	16480	10300	8755	18540	14935	13905
23.5-25	20	TL	191	A2	19.50/2.5	19.50/2.5 IF (2)	1617	597	720	4689	35	54	17440	10900	9265	19620	15805	14715
23.5-25	24	TL	196	A2	19.50/2.5	19.50/2.5 IF (2)	1617	597	720	4689	35	69	20000	12500	10625	22500	18125	16875



NB-60 (L-3)

Delivers outstanding grip in construction sites thanks to its non directional tread pattern design. The tread compound ensures excellent cut and chip resistance. Provides outstanding durability thanks to its solid tread center structure and strong nylon carcass.



TIRE SIZE	PR	TT/ TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)					
													OFF ROAD PURPOSES			HARD IMPROVED SURFACE		
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			SPEED (KM/H)					
													STATIC	10	25	STATIC	5	10
17.5-25	16	TL	177	A2	14.00/1.5	14.00/1.3 (1); 13.00/1.4 (DC)	1348	445	610	3909	26	69	11680	7300	6205	13140	10585	9855
20.5-25	20	TL	186	A2	17.00/2.0	17.00/2.0 IF (2)	1492	520	669	4327	30	65	15200	9500	8075	17100	13775	12825
23.5-25	20	TL	191	A2	19.50/2.5	19.50/2.5 IF (2)	1617	597	720	4689	35	54	17440	10900	9265	19620	15805	14715
23.5-25	24	TL	196	A2	19.50/2.5	19.50/2.5 IF (2)	1617	597	720	4689	35	69	20000	12500	10625	22500	18125	16875
26.5-25 CR	28	TL	203	A2	22.00/3.0	22.00/3.0 IF (2)	1750	673	775	5075	39	69	24800	15500	13175	27900	22475	20925
26.5-25 CR	32	TL	206	A2	22.00/3.0	22.00/3.0 IF (2)	1750	673	775	5075	39	80	27200	17000	14450	30600	24650	22950
29.5-25 CR	28	TL	207	A2	25.00/3.5	25.00/3.5 IF (2)	1873	750	825	5432	44	62	28000	17500	14875	31500	25375	23625
29.5-25 CR	32	TL	210	A2	25.00/3.5	25.00/3.5 IF (2)	1873	750	825	5432	44	62	30400	19000	16150	34200	27550	25650

CR: Cut Resistance



petlas

NB-70 (L-3)

Delivers optimized performance on all terrains. The special compound and aggressive design of the tread pattern enhances handling throughout its exceptionally long life. Provides outstanding resistance to cuts and wears. Specifically designed to offer ultimate performance when excellent traction is needed.



TIRE SIZE	PR	TT/ TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)					
													OFF ROAD PURPOSES			HARD IMPROVED SURFACE		
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			Speed (KM/H)					
													STATIC	10	25	STATIC	5	10
15.5-25	12	TL	168	A2	12.00/1.3	12.00/1.3 (DC) (1)	1277	394	581	3703	25	58	8960	5600	4760	10080	8120	7560
17.5-25	16	TL	177	A2	14.00/1.5	14.00/1.3 (1) ; 13.00/1.4 (DC)	1348	445	610	3909	26	69	11680	7300	6205	13140	10585	9855
17.5-25	20	TL	181	A2	14.00/1.5	14.00/1.3 (1) ; 13.00/1.4 (DC)	1348	445	610	3909	26	83	13200	8250	7010	14850	11960	11135
20.5-25	20	TL	186	A2	17.00/2.0	17.00/2.0 IF (2)	1492	520	669	4327	30	65	15200	9500	8075	17100	13775	12825
23.5-25	20	TL	191	A2	19.50/2.5	19.50/2.5 IF (2)	1617	597	720	4689	35	54	17440	10900	9265	19620	15805	14715
23.5-25	24	TL	196	A2	19.50/2.5	19.50/2.5 IF (2)	1617	597	720	4689	35	69	20000	12500	10625	22500	18125	16875
26.5-25 CR	28	TL	203	A2	22.00/3.0	22.00/3.0 IF (2)	1750	673	775	5075	39	69	24800	15500	13175	27900	22475	20925
26.5-25 CR	32	TL	206	A2	22.00/3.0	22.00/3.0 IF (2)	1750	673	775	5075	39	80	27200	17000	14450	30600	24650	22950
29.5-25 CR	28	TL	207	A2	25.00/3.5	25.00/3.5 IF (2)	1873	750	825	5432	44	62	28000	17500	14875	31500	25375	23625
29.5-25 CR	32	TL	210	A2	25.00/3.5	25.00/3.5 IF (2)	1873	750	825	5432	44	62	30400	19000	16150	34200	27550	25650

CR: Cut Resistance



NB-70 (L-4)

Delivers outstanding grip in construction sites thanks to its non directional tread pattern design. The tread compound ensures excellent cut and chip resistance. Provides outstanding durability thanks to its solid tread center structure and strong nylon carcass.



TIRE SIZE	PR	TT/TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/ LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)			LOAD CAPACITY PER TIRE (KG)		
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			OFF ROAD PURPOSES			HARD IMPROVED SURFACE		
													SPEED (KM/H)					
													STATIC	10	25	STATIC	5	10
26.5-25 CR	32	TL	206	A2	22.00/3.0	22.00/3.0 IF (2)	1798	673	794	5214	64	80	27200	17000	14450	30600	24650	22950
29.5-25 CR	28	TL	207	A2	25.00/3.5	25.00/3.5 IF (2)	1921	750	825	5432	69	62	28000	17500	14875	31500	25375	23625


CR: Cut Resistance



petlas

C+CARRIER (IND-4)

Specially designed for port applications. Deep and non-directional tread design delivers excellent traction and ensures long operating hours. Offers excellent durability features and high resistance against cuts, chunks and wears. Wide centerline enables riding comfort.



IMPROVED

TIRE SIZE	PR	TT/ TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)			LOAD CAPACITY PER TIRE (KG)			
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			OFF ROAD PURPOSES			HARD IMPROVED SURFACE			
														SPEED (KM/H)					
														STATIC	10	15	20	25	30
														FREE AXLE					
18.00-25	40	TL	207	A5	13.00/2.5	13.00(2.5 IF (2) ; 15.00/2.5	1673	498	743	4852	68	145	25200	18900	18200	17850	17500	16975	
														DRIVE AXLE					
														31500	23625	22750	22225	21875	21350




C+CARRIER SMOOTH (IND-4S)



Smooth treaded tire for port applications. Optimized tread compound offers outstanding resistance to wear and ensures exceptional longevity. Promises high stability thanks to its smooth tread design. Highly resistant to abrasion.


IMPROVED

TIRE SIZE	PR	TT/ TL	LOAD INDEX	SPEED SYMBOL	RIM		INFLATED DIMENSIONS (NO LOAD)		INFLATED DIMENSIONS (W/LOAD)		TREAD DEPTH (MM)	INFLATING PRESSURE (psi)	LOAD CAPACITY PER TIRE (KG)			LOAD CAPACITY PER TIRE (KG)		
													OFF ROAD PURPOSES			HARD IMPROVED SURFACE		
					RECOM. (INCHES)	PERMITTED (INCHES)	OUTER DIAMETER (MM)	SECTION WIDTH (MM)	STATIC LOADED RADIUS (MM)	DYNAMIC RADIUS CIRCLE (MM)			SPEED (KM/H)					
													STATIC	10	15	20	25	30
FREE AXLE																		
18.00-25	40	TL	207	A5	13.00/2.5	13.00(2.5 IF (2) ; 15.00/2.5	1673	498	743	4852	62	145	25200	18900	18200	17850	17500	16975
DRIVE AXLE																		
													31500	23625	22750	22225	21875	21350

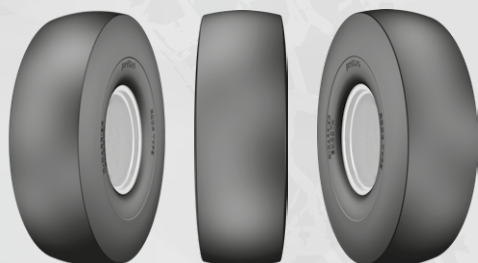
petlas

NOTES

Petlas IND-OTR tires are characterized by quality workmanship, leading edge technology, unique tread designs and excellent performance offering perfect mix of quality and value.

Our success depends on exceeding the expectations of our customers and standing behind everything we do.


Our aim is to build long term relationships with our customers by providing excellent service, quality and delivering our promises.



petlas
TRACK OF TRUST

2024 EDITION

DISTRIBUTED BY



petlas

Headquarters - Factory

Petlas Tire Industry and Trade
Kindam Mahallesi Ankara - Kayseri Caddesi
No: 2/1 Kırşehir / TURKEY
T: +90 386 252 65 50 • F: +90 386 252 65 70

Int. Sales & Marketing

Petlas Tire Industry and Trade Ako Kule
Söğütözü Mh. 2178. Cd. No: 6
06530 Ankara/TURKEY
T. +90 312 309 30 30 • F: +90 312 309 22 66

Petlas Tire USA

1111 E. Lincolnway STE 205
Cheyenne, WY 82001 USA

www.petlas.com

MADE IN TÜRKİYE